



Features


- Cast iron with Safeguard® finish
- Center drain outlet
- Drop-in or tile-in installation
- 48" (121.9 cm) x 36" (91.4 cm) x 4" (10.2 cm)

ENAMELED CAST IRON SHOWER RECEPTOR K-9025, K-9026

Codes/Standards Applicable

Specified model meets or exceeds the following:

- IAPMO/UPC
- ASME A112.19.1M
- CSA B45

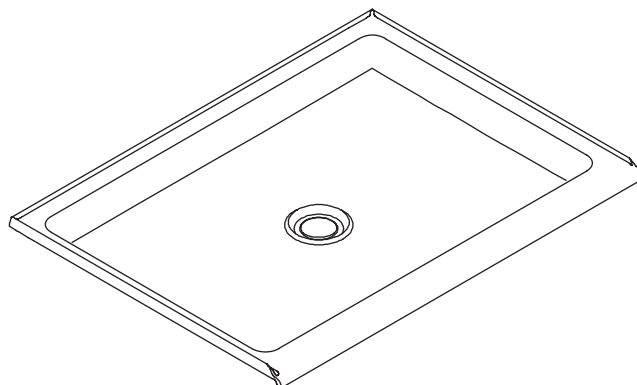

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- PB: Polished Brass
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes		
K-9025	Kathryn® receptor with center drain (honeycomb Safeguard pattern)	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____	
K-9026	Purist® receptor with center drain (rectangular Safeguard pattern)	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____	
Recommended Accessory		Colors/Finishes		
K-9132	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
Optional Accessories		Colors/Finishes		
K-9027	Teak shower grate	<input type="checkbox"/> NA		
K-1679-PC	Steam generator	<input type="checkbox"/> NA		
K-1647-PC	Steam generator control kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____

Product Specification

The enameled cast iron shower receptor shall be 48" (121.9 cm) in length, 36" (91.4 cm) in width, and 4" (10.2 cm) in height. Shower receptor shall have Safeguard finish, center drain, and allow for drop-in or tile-in installation. Product shall be Kohler Model K-_____-_____.

Technical Information


Fixture*:	
Weight	175 lbs (79.4 kg)
Drain Outlet	3-3/8" (8.6 cm) D.
Configuration	1-piece
*Approximate measurements for comparison only.	

Installation Notes

Install this product according to the installation guide.

The dimensions are applicable for this product only and should not be used to fabricate substitute bases for shower enclosures.

The K-1679-PC steam generator and the K-1647-PC steam generator control kit are designed for use with this product. Kohler shall not be responsible for problems encountered due to the installation and use of other manufacturer's steam generators.

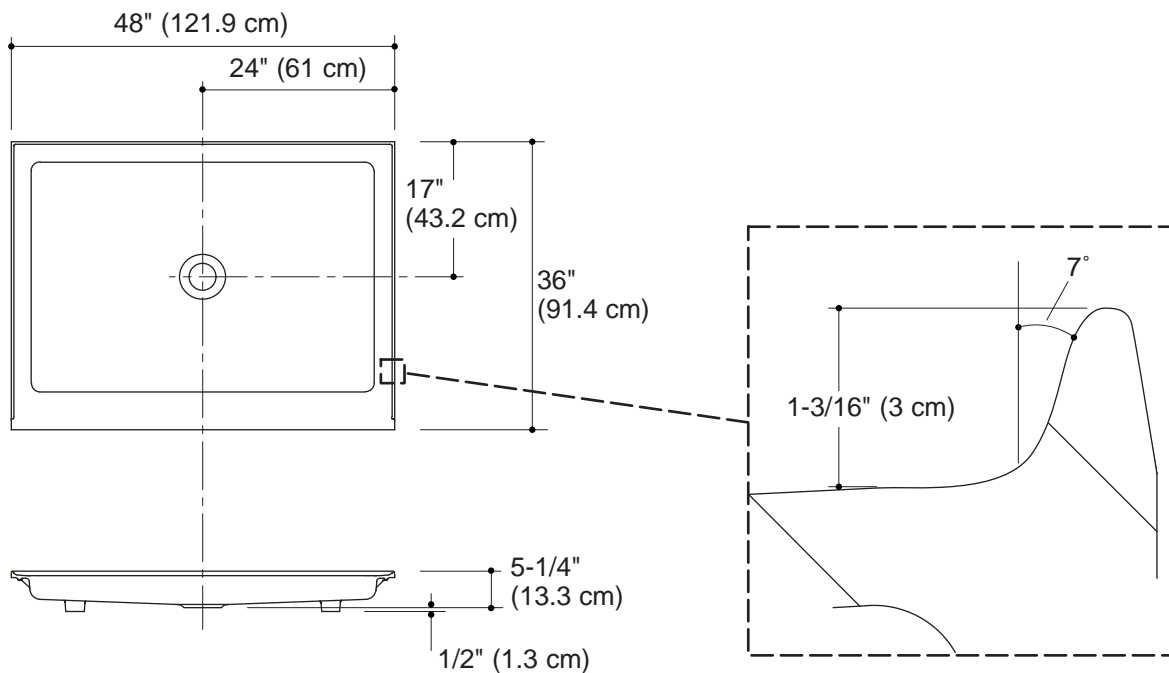

Product Diagram

ENAMELED CAST IRON SHOWER RECEPTOR

Page 2 of 2
1009404-4-D

THE BOLD LOOK
OF **KOHLER**